



SOUND CURTAINS
BY SOUND SEAL

QUILTED FIBERGLASS ABSORBERS

SPEC DATA SHEET **QFA SERIES**



QFA-1

QUILTED FIBERGLASS ABSORBER


Quilted Fiberglass Sound Absorbers reduce the reflection of sound waves by adding soft, porous, open-celled materials to any environment. The **QFA-1** product consists of a vinyl coated fiberglass cloth on one side of 1" quilted fiberglass with non-porous scrim facing on the opposite side. Wall panels and overhead baffles are constructed with all edges bound and grommets across the top.


FEATURES:

- Excellent acoustical performance (NRC .70)
- Class A fire rated per ASTM E-84
- Flame Spread: 17.66
- Smoke Density: 22.75
- Temperature Range: -20° to +180° F
- Weight: 1.60 lb psf
- Available in bound or unbound rolls @ 4' x 25'

APPLICATIONS:

- Used to reduce the reverberant noise energy in an enclosure, room or building

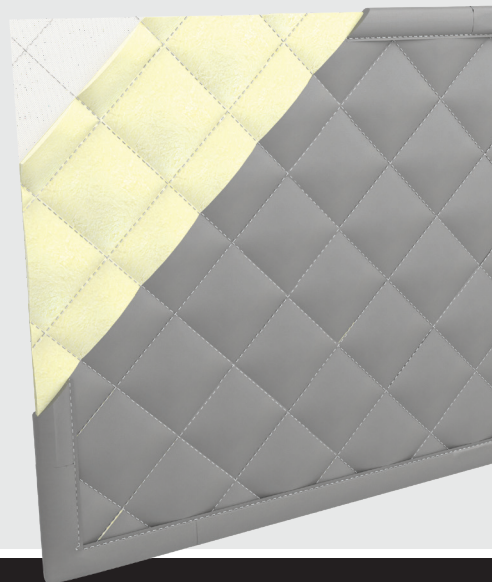

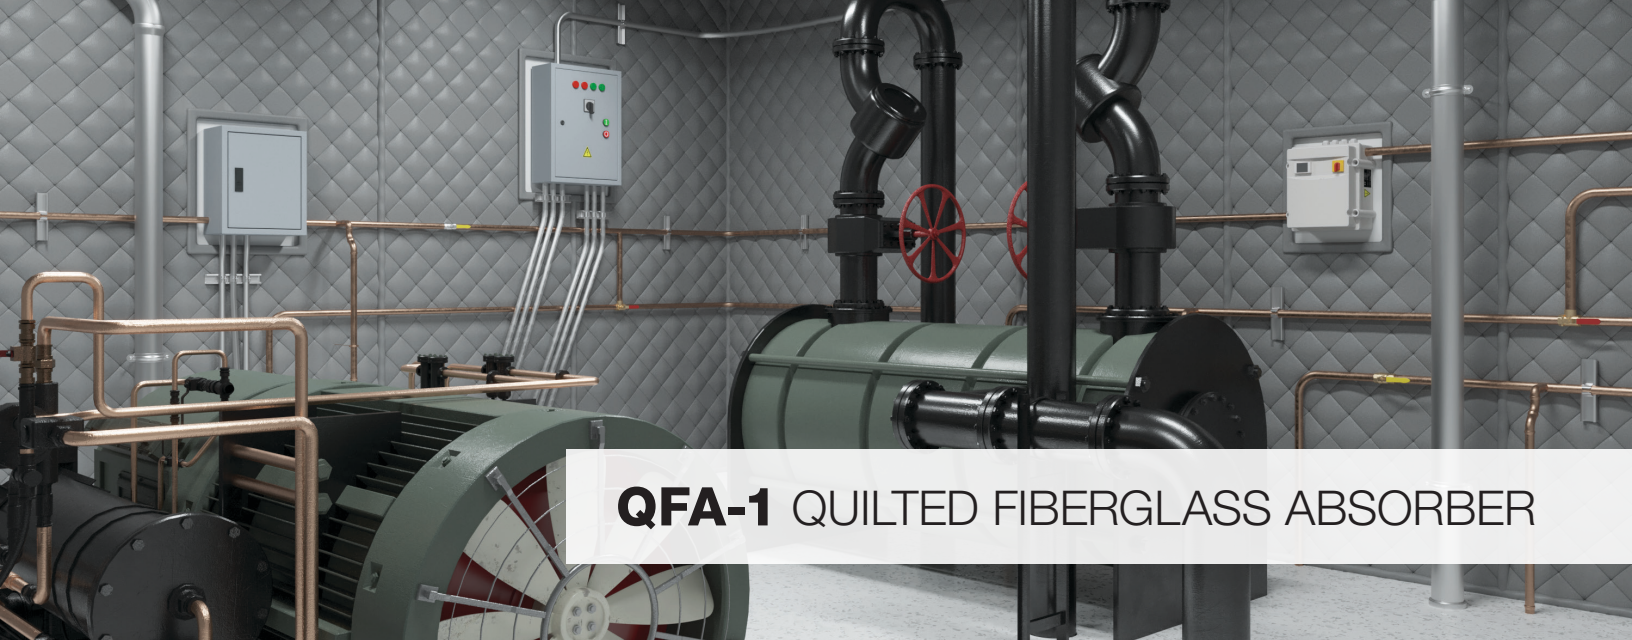

QFA-1 QUILTED FIBERGLASS ABSORBER

ACOUSTICAL PERFORMANCE

Sound Absorption Coefficients at the Octave Band Frequencies							
Frequency (Hz)	125	250	500	1K	2K	4K	NRC
QFA-1	.12	.47	.85	.84	.64	.62	.70

ASTM C 423

SIZING

All standard curtains are manufactured at 48" wide x any desired length up to 25' long with a 1" nominal thickness. Custom width panels and special options are available upon request.


AVAILABLE STITCHING

Diamond or straight-stitch pattern

AVAILABLE COLORS



Grey



Black



Tan



White

Color Disclaimer — Due to inconsistencies of various monitors, lighting sources, digital photography and fabric dye lot variations, we cannot guarantee that the color you see on your screen accurately portrays the true color of the product. Screen images are intended as a guide only. Swatch samples available upon request.



SPECIFICATIONS:

Visit www.soundseal.com
or call **1.800.569.1294**

soundseal.com/qfa



www.soundseal.com | [in](#) [X](#) [v](#) [f](#) [@](#)