



SOUND CURTAINS
BY SOUND SEAL

INDUSTRIAL BAFFLES

SPEC DATA SHEET **BAFFLES**



FDA

ACOUSTIC BAFFLES


FDA Baffles are an effective, economic method of reducing reverberant noise in areas where sanitary conditions and USDA- or FDA-approved products are mandatory.

FEATURES:

- FDA Approved, USDA listed
- Meets health and sanitary standards
- Washable
- Rip and stain resistant
- Watertight seal on all edges
- Dimensionally stable
- Light reflective white facing
- Temperature Range: -40°F to 200°F

APPLICATIONS:

- Appropriate as a noise control solution in food processing, meat packaging or poultry processing plants, pharmaceutical facilities, facilities medically treating humans or animals, institutional kitchens, breweries, wineries or bottling plants, swimming pools or other O.E.M. applications.

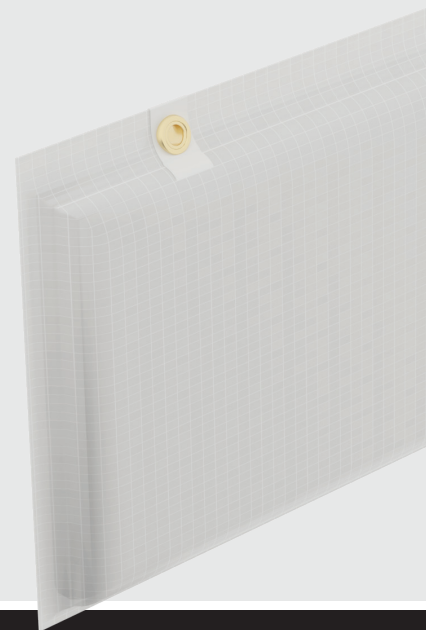

FDA ACOUSTIC BAFFLES

ACOUSTICAL PERFORMANCE

Sound Absorption Coefficients at the Octave Band Frequencies							
Frequency (Hz)	125	250	500	1K	2K	4K	NRC
Type A	1.15	5.26	8.0	10.9	9.34	5.5	8.4
Type B	1.00	8.09	14.65	15.72	12.68	4.93	12.8

ASTM C 423-90a & C423-81

SIZING

- Type "A": 2' x 4' x 1-1/2" thick
- Type "B": 2' x 4' x 2" thick

Standard baffles have two grommets installed on one 4' side for suspending from wire or cable ties. Optional spacing or additional brass grommets available.



SPECIFICATIONS:

Visit www.soundseal.com
or call **1.800.569.1294**

soundseal.com/industrialbaffles



www.soundseal.com | [in](#) [twitter](#) [youtube](#) [facebook](#) [instagram](#)

 A CATALYST ACOUSTICS GROUP BRAND